


Description: 25 μ F 250V GRIP WIRE ALUMINIUM M8

Capacitor Electrical Data

Capacitance (μ F)	25
Tolerance ($\pm\%$)	10%
Voltage (V)	250
Frequency (Hz)	50/60
Discharge Resistance	Incorporated
Diameter (mm)	36
Length (mm)	100
Case material	Aluminium
Fixing	M8 bottom screw
Termination	Push wire
Temperature range ($^{\circ}$ C)	-25 +85
Dielectric	Metallized Polypropylene Film
Protected	No
Standard	EN 61048/61049

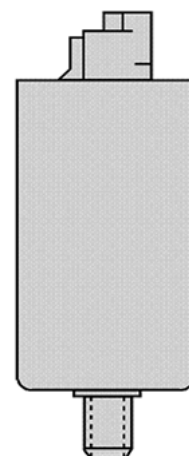

Capacitor Diagram

Revision: 10-06-2013

See page 2 for product notes



Product Code: R1008CR250A25

Notes:

* ENEC approved