


Description: 30 μ F 450V 50HZ WITH PROT 300mm LEADS

Capacitor Electrical Data

Capacitance (μ F)	30
Tolerance ($\pm\%$)	10%
Voltage (V)	450
Frequency (Hz)	50
Discharge Resistance	Incorporated
Diameter (mm)	40
Length (mm)	119
Case material	Aluminium
Fixing	M8
Termination	300mm leads $\hat{a}$ €
Temperature range ($^{\circ}$ C)	-25 +85
Dielectric	Metallized Polypropylene Film
Protected	Break action mechanism
Standard	EN 61048/61049

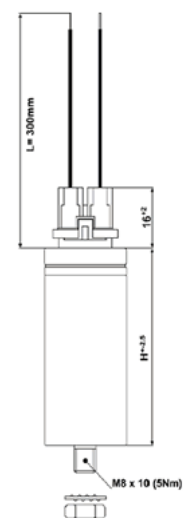

Capacitor Diagram

Revision: 10-06-2013

See page 2 for product notes



Product Code: R1008FD300A44AX

Notes:

â€ Lead temperature rating: 90Â°C

Resin filled