


150 Watt HID Ballast

Ballast Code: HSJ152222BD

Electrical Data (Ballast)	
Lamp Watts (W)	150
Lamp Current (A)	1.8
Input Voltage at 60Hz (V)	220/230
Circuit Watts (W)	176
Running Current (A)	0.8
Delta T (°C)	75
tw (°C)	140
ta (°C)	-
Thermal Cut-out	Y
Capacitor Value (µf)	16
Capacitor Voltage (V)	250

Physical Data (Ballast)




Dimensions (mm)	L	W	H
	120	69	56
Fixings (mm)	106-111		
Weight (kg)	1.8		

MCI Series Ignitor 220/240V ±10% 60Hz

Ignitor Code: MCI6-6


Electrical Data (Ignitor)	
Wattage (W)	35-600
Timed	Y
Ignitor Type	Semi-Parallel
Max Lamp Current (A)	N/A
Pulse Magnitude (kV)	3.0-4.5
Max. Lead Capacitance (pf)	1000
Max Case Temp (°C)	105
Internal Temp (°C)	N/A

Physical Data (Ignitor)




Dimensions (mm)	L	W	H
	50	25	17
Fixing	M8x10		
Weight (kg)	0.08		

Capacitor

	
Value µf±10%	16.0
Product Code	16/250
Dimensions ØxL	35x74

Circuit Diagram

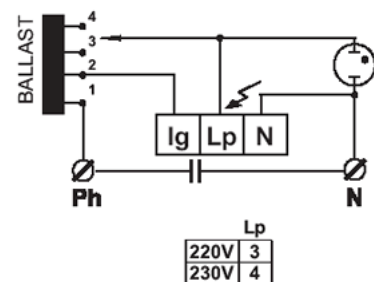

Notes:

1. Additional fixings 52x11-18mm and side fixings 112-125mm

Data is based upon tests performed by Venture Lighting in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.