


### 150 Watt HID Ballast

**Ballast Code: HSV16322221**

Electrical Data (Ballast)	
Lamp Watts (W)	150
Lamp Current (A)	1.8
Input Voltage at 50Hz (V)	220/230/240/250
Circuit Watts (W)	175
Running Current (A)	0.8
Delta T (°C)	75
tw (°C)	140
ta (°C)	-
Thermal Cut-out	Y
Capacitor Value (µf)	20
Capacitor Voltage (V)	250

### Physical Data (Ballast)




Dimensions (mm)	L	W	H
	125	78	65
Fixings (mm)	110		
Weight (kg)	2.4		

### Timed Ignitor 220/240V ±10% 50/60Hz

**Ignitor Code: PJ019K255**

Electrical Data (Ignitor)	
Wattage (W)	150
Timed	Y
Ignitor Type	Impulser
Max Lamp Current (A)	N/A
Pulse Magnitude (kV)	3.0-4.5
Max. Lead Capacitance (pF)	3000
Max Case Temp (°C)	90
Internal Temp (°C)	N/A


### Physical Data (Ignitor)




Dimensions (mm)	Ø	L	
	39	71	
Fixing	M8x10		
Weight (kg)	0.14		

### Capacitor

### Circuit Diagram

	
Value µf±10%	20.0
Product Code	20/250
Dimensions ØxL	35x98

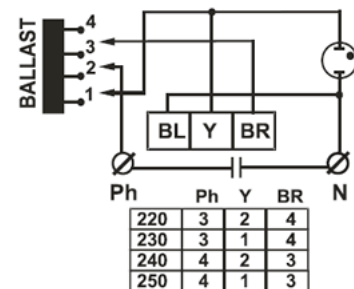

### Notes:

Data is based upon tests performed by Venture Lighting in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.