


### 150 Watt HID Ballast

**Ballast Code: HSP152222BD**

Electrical Data (Ballast)	
Lamp Watts (W)	150
Lamp Current (A)	1.8
Input Voltage at 60Hz (V)	220/230
Circuit Watts (W)	176
Running Current (A)	0.8
Delta T (°C)	75
tw (°C)	140
ta (°C)	-
Thermal Cut-out	Y
Capacitor Value (µf)	16
Capacitor Voltage (V)	250

### Physical Data (Ballast)




Dimensions (mm)	L	W	H
	135	65	52
Fixings (mm)	52x118-127		
Weight (kg)	1.8		

### MCi Series Ignitor 220/240V ±10% 60Hz

**Ignitor Code: MCi6-6**


Electrical Data (Ignitor)	
Wattage (W)	35-600
Timed	Y
Ignitor Type	Semi-Parallel
Max Lamp Current (A)	N/A
Pulse Magnitude (kV)	3.0-4.5
Max. Lead Capacitance (pf)	1000
Max Case Temp (°C)	105
Internal Temp (°C)	N/A

### Physical Data (Ignitor)




Dimensions (mm)	L	W	H
	50	25	17
Fixing	M8x10		
Weight (kg)	0.08		

### Capacitor

	
Value µf±10%	16.0
Product Code	16/250
Dimensions ØxL	35x74

### Circuit Diagram

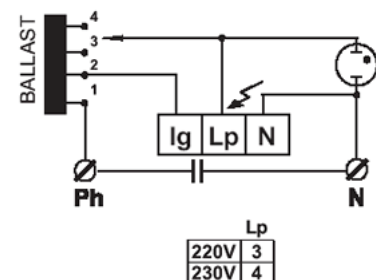

### Notes:

Data is based upon tests performed by Venture Lighting in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.