

Ventronic

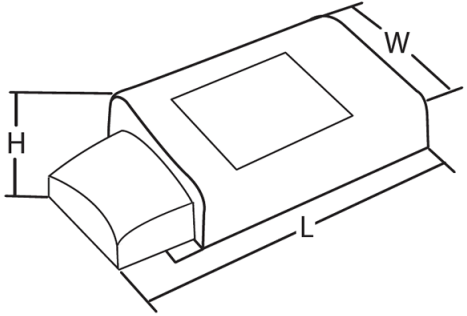


Ballast Code	Type	Lamp Types
V70MSC255	Standard	70W (Quartz, Ceramic, HPS)

Electrical Data

Actual Lamp Power (W)	72	Power Factor	>0.95
Circuit Watts (W)	79	Lamp Waveform	Square Wave
		Ignition Voltage (kV)	2.5
Input Voltage (V)	220 - 240 ± 10%	Short Circuit Protection	Yes
Frequency	50 / 60Hz	Continuous Open Circuit	Yes
Max Ballasts per Circuit	35	Maximum Cable Capacitance (pf)	2500
Dimming Power Level		Lamp Operating Frequency (Hz)	200

Physical Data / Requirements

Termination	Type	Cable Clamp	
	Size (mm ²)	2.5	
	Length (mm)		
Case Type	Aluminium Covered		
Weight (g)	230		
Length (mm)	148		
Width (mm)	76		
Height (mm)	32		
Fixings (mm)	100 x 64		
Thermal Protection	Yes		
End of Lamp Protection	Yes		
Maximum Case Temperature (°C)	80		
Thermal Protection Auto Reset	Yes		
Maximum Ambient Temperature (°C)	50		
Minimum Ambient Temperature (°C)	-40		

Additional Information