

Ventronic

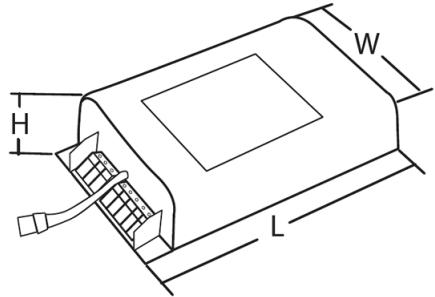


| Ballast Code | Type | Lamp Types |
|-----------------|---------|----------------------------|
| V70SSB255-WiMAC | Dimming | 70W (Quartz, Ceramic, HPS) |

Electrical Data

| | | | |
|--------------------------|-----------------|--------------------------------|-------------|
| Actual Lamp Power (W) | 72 | Power Factor | >0.95 |
| Circuit Watts (W) | 79 | Lamp Waveform | Square Wave |
| | | Ignition Voltage (kV) | 2.5 |
| Input Voltage (V) | 220 - 240 ± 10% | Short Circuit Protection | Yes |
| Frequency | 50 / 60Hz | Continuous Open Circuit | Yes |
| Max Ballasts per Circuit | 35 | Maximum Cable Capacitance (pf) | 2500 |
| Dimming Power Level | Adjustable | Lamp Operating Frequency (Hz) | 160 |

Physical Data / Requirements

| | | | |
|----------------------------------|-------------------------|-----------|---|
| Termination | Type | Grip Wire |  |
| | Size (mm ²) | 2.5 | |
| | Length (mm) | | |
| Case Type | Aluminium Covered | | |
| Weight (g) | 325 | | |
| Length (mm) | 144 | | |
| Width (mm) | 91 | | |
| Height (mm) | 37 | | |
| Fixings (mm) | 130 - 135 x 73 - 78 | | |
| Thermal Protection | Yes | | |
| End of Lamp Protection | Yes | | |
| Maximum Case Temperature (°C) | 80 | | |
| Thermal Protection Auto Reset | Yes | | |
| Maximum Ambient Temperature (°C) | 50 | | |
| Minimum Ambient Temperature (°C) | -40 | | |

Additional Information