

| Ballast Code | Type | Lamp Types |
|--------------|----------|-----------------------|
| V60SSB255 | STANDARD | 60W VENTURE, UNI-FORM |

Electrical Data


| | | | | |
|-----------------------------------|-----------------------|--------------------------------|-------------|------------|
| Actual Lamp Power (W) | 60 | | | |
| Circuit Watts (W) | 69 | | | |
| Dimmed Power Level | NOT APPLICABLE | 67% | 50% | 35% |
| Dimmed Lamp Power (W) | | | | |
| Dimmed Circuit Watts (W) | | | | |
| Input Voltage (V) | 220 - 240 ±10% | Lamp Waveform | Square Wave | |
| Input Frequency (Hz) | 50 / 60 | Lamp Operating Frequency (Hz) | 160 | |
| Input Current (A) @ 240V | 0.25 | Voltage Ignition (kV) | 2.5 | |
| Power Factor | >0.95 | Maximum Cable Capacitance (pf) | 2500 | |
| Total Harmonic Distortion (THD) % | <10 | Internal Data Logging | No | |
| Max Ballasts per C16A Circuit | 41 | | | |

Safety / Thermal Requirements

| | | | |
|------------------------------------|-----|----------------------------------|-----|
| Short Circuit Protection | Yes | Maximum Case Temperature (°C) | 80 |
| Continuous Open Circuit | Yes | Maximum Ambient Temperature (°C) | 50 |
| Thermal Protection with Auto Reset | Yes | Minimum Ambient Temperature (°C) | -40 |
| End of Lamp Protection | Yes | Ignition Cut-Out Time | |

Physical Data / Requirements

| | | |
|------------------------------|-------------------------|-------------|
| Termination | Type | Gripwire |
| | Size (mm ²) | 0.75 - 2.5 |
| | Length (mm) | Not Applica |
| Case Type | Aluminium | |
| Length x Width x Height (mm) | 144 x 91 x 37 | |
| Fixings (mm) | 130 - 135 x 73 - 78 | |
| Weight (g) | 325 | |
| Conformal Coating | None | |
| IP Rating | IP20 - SEE NOTE 3 | |
| | | |

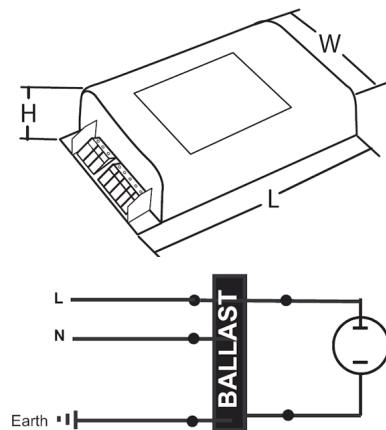

Additional Information

NOTE 3 - FOR INTERNAL USE ONLY