



3 HOURS'  
EMERGENCY



SELF - TEST



2 YEAR  
BATTERY  
WARRANTY



LITHIUM  
BATTERY



YEARS'  
WARRANTY




NEXT DAY  
DELIVERY

**EMERGENCY**



VENTURE  
LIGHTING

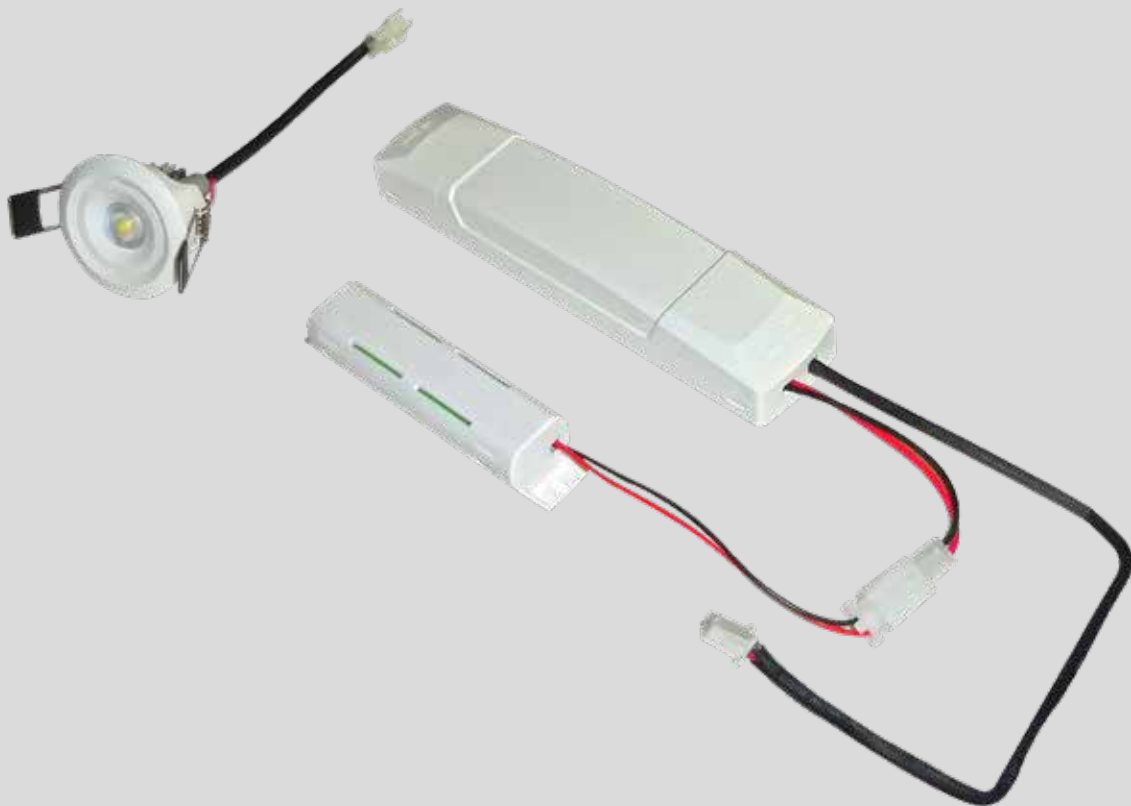

# 1W NON-MAINTAINED EMERGENCY DOWNLIGHT

# EMG037 | 1W NON-MAINTAINED EMERGENCY DOWNLIGHT



**3 HOURS' EMERGENCY**



**SELF - TEST**



**2 YEARS' BATTERY WARRANTY**



**LITHIUM BATTERY**



**YEARS' WARRANTY**



**NEXT DAY DELIVERY**



The Emergency Downlight is a standalone complement to any office or retail environment. The unit is **discreet and unobtrusive** when installed but **capable of supplying over three hours of non-maintained emergency lighting**.

## FEATURES

3 Hours Emergency Duration

Lithium Iron Phosphate Battery

Multiple Lens Options

PART NO.	WATTS	DESCRIPTION	BEAM	EFFICACY	LUMENS	Ra/CCT	SYSTEM POWER (W)	WEIGHT (KG)	DIMENSIONS (Ø x H mm)
EMG037 - DL	1	1W Emergency Downlight, Corridor Lens	130x30°	90	107	760	1.2	0.21	BEZEL: 50Ø x 39 BATTERY: 112 x 26Ø DRIVER: 180 x 40 x 24 CUT OUT: 45Ø
EMG037 - DO	1	1W Emergency Downlight, Open Lens	130°	100	119	760	1.2	0.21	BEZEL: 50Ø x 39 BATTERY: 112 x 26Ø DRIVER: 180 x 40 x 24 CUT OUT: 45Ø

## ELECTRICAL DATA

MAINS VOLTAGE	MAINS CURRENT	POWER FACTOR	REPLACEMENT BATTERY
220-240V	38mA	0.1	LiFePO4 3.2V 1500mAh

## LOGISTICAL DATA

GROSS WEIGHT	BOX DIMENSIONS	BOX QTY	CARTON DIMENSIONS	CARTON QTY
0.27	238x94x60	1	460x265x255	20

## ENVIRONMENTAL DATA

### AMBIENT TEMPERATURE RANGE

0 - 40C

### APPLICATIONS

Offices  
Corridors  
Exit routes

## SPACING ESCAPE ROUTE 2M WIDE (1 LUX MIN)

PART NO.	MOUNTING HEIGHT (m)	SPACING TO WALL	SPACING BETWEEN EMG037(s)
EMG037-DL	2.5	6.2	13.1
	4	6.3	17.3
	6	-	-



## SPACING OPEN (ANTI-PANIC) AREA (0.5 LUX MIN)

PART NO.	MOUNTING HEIGHT (m)	SPACING TO WALL	SPACING BETWEEN EMG037(s)
EMG037-DO	2.5	3.8	9.9
	4	3.4	12.3
	6	2.8	12.8

