




Venture Lighting Europe pushes to improve its current range of street lighting and redefines LED Street lighting with new cutting edge performance across its range. Bringing the new Vsoldier PLUS in to light with 100,000 Hours lifetime and durable construction.

Venture Lighting Europe offers a wide range of accessories to fulfil different design needs across the world, all with high Ingress Protection and durability .

SURGE PROTECTION

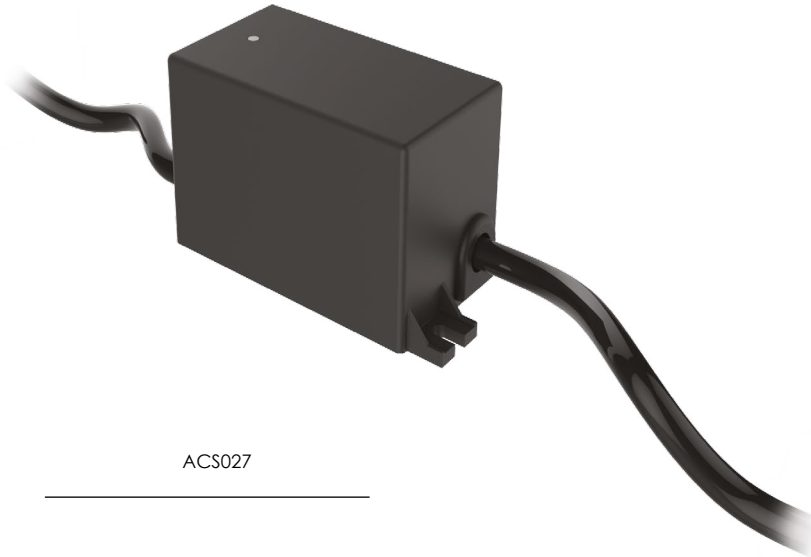

ACS027

PHYSICAL DATA

IP Rating IP67

DIMENSIONS (mm)


ACS027 74.5 x 37.5 x 32

WEIGHT (kg)

ACS027 0.15

PART NO.	DESCRIPTION	RESPONSE TIME	RESIDUAL VOLTAGE VALUE	RATED LOAD POWER	SURGE PROTECTION L-E (kV)	NOMINAL DISCHARGE CURRENT(kA) 8/20µs	MAX DISCHARGE CURRENT (kA)
ACS027	10kV Surge Protector, IP67	L-N ≤25nS N-PE≤100nS L-PE≤100nS	<1500V	2kW	10	5	10

PHOTOCELLS

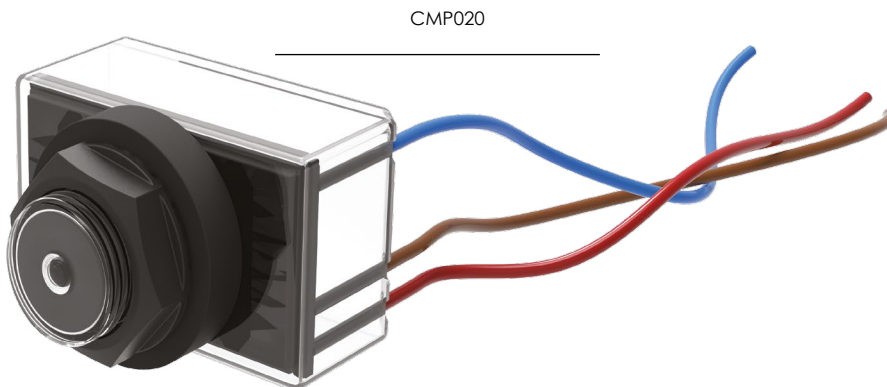

CMP020

PHYSICAL DATA

IP Rating IP65

Max Ambient Temp. (°C) 75

Min Ambient Temp. (°C) -20

DIMENSIONS (mm)


CMP020 54 x 32 x 45

WEIGHT (kg)

CMP020 0.06

PART NO.	DESCRIPTION	SUPPLY VOLTAGE	SWITCHING LEVEL	SWITCHING DIFFERENTIAL	POWER CONSUMPTION
CMP020	Miniature Photocell, 20mm, 1:0.5 Ratio, 55lux	198-264V	55 Lux	1:0.5 NEG	<0.25W

NEMA PHOTOCELL

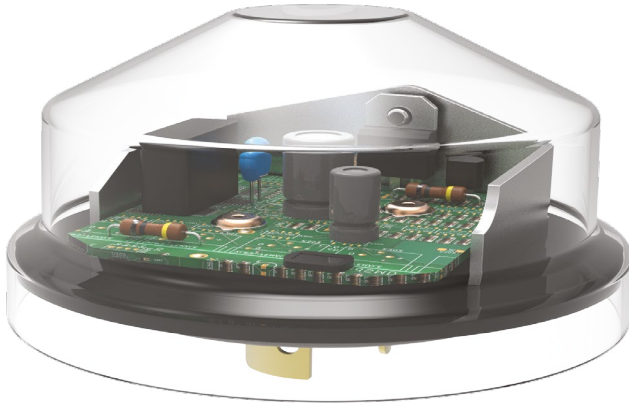

CMP036

PHYSICAL DATA

IP Rating	IP65
Max Ambient Temp. (°C)	80
Min Ambient Temp. (°C)	-20

DIMENSIONS (mm)

CMP036	Ø80 x 60
--------	----------


WEIGHT (kg)

CMP036	0.08
--------	------

PART NO.	DESCRIPTION	SUPPLY VOLTAGE	SWITCHING LEVEL	SWITCHING DIFFERENTIAL	POWER CONSUMPTION
CMP036	NEMA Photocell, 1:0.5 Ratio, 35Lux	198-264V	35 Lux	1:0.5 NEG	<0.25W

NEMA SOCKET

CMP037

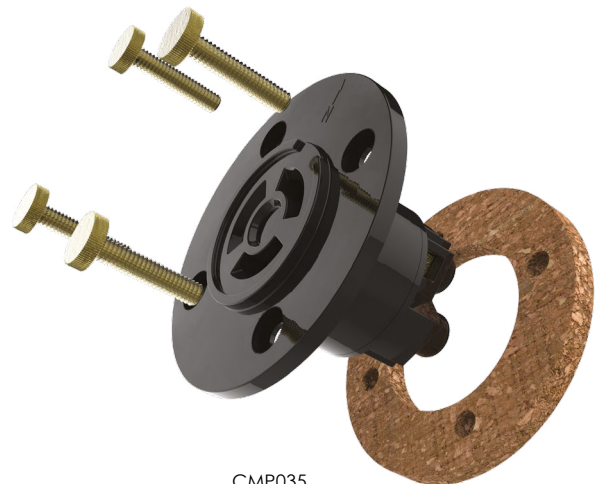

CMP035

PART NO.	DESCRIPTION
CMP035	NEMA 3 Pin Socket + Cork Gasket
CMP037	NEMA 3 Pin Socket, Studded & Cork Gasket

PHYSICAL DATA

DIMENSIONS (mm)

CMP035 / CMP037	Ø66 x 41
CUT OUT	Ø38

WEIGHT (kg)

CMP035 / CMP037	0.1
-----------------	-----