

GU10 RETRO - NON DIM



DOM010
DOM011
DOM012

DOM013
DOM014
DOM015

Features

- L70 lumen maintenance at end of life.
- Instant warm-up time.
- SDCM <6.
- 40,000 Switching Cycles.


ADVANTAGES

- Excellent optical design, consistency in colour of light.
- Reliable IC solution, automatic production.
- S-shaped base, IEC standard size.


APPLICATIONS

- Market, Walkways, Hospital, Shops & Domestic.

Spectral Power Distribution

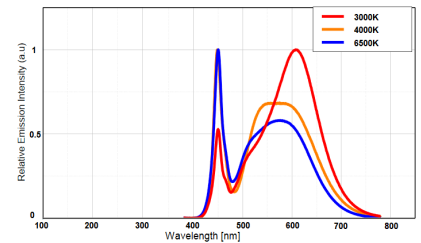

Light Distribution

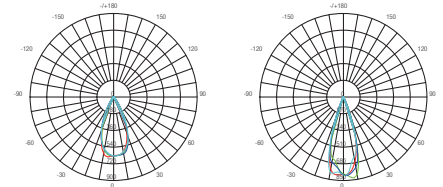

PAR16

Model	Watt. (W)	Replace Watt.(W)	Φ90° (lm)	CBCP (cd)	CCT (K)	CRI (Ra)	Power Factor	Lifespan (Hrs)	Base	Max Dimension (mm)		Box Quantity
										Diameter	Length	
DOM010	3.6	35	250	620	3000	80	>0.4	25000	GU10	50	54	100
DOM011	3.6	35	255	645	4000	80	>0.4	25000	GU10	50	54	100
DOM012	3.6	35	255	645	6500	80	>0.4	25000	GU10	50	54	100
DOM013	4.4	50	345	875	3000	80	>0.4	25000	GU10	50	54	100
DOM014	4.4	50	360	920	4000	80	>0.4	25000	GU10	50	54	100
DOM015	4.4	52	360	920	6500	80	>0.4	25000	GU10	50	54	100

* SUBJECT TO TERMS AND CONDITIONS

Energy Labels

