


Description: 20 μ F 250V GRIP WIRE + LEADS PLASTIC M8

Capacitor Electrical Data

Capacitance (μ F)	20
Tolerance ($\pm\%$)	10%
Voltage (V)	250
Frequency (Hz)	50/60
Discharge Resistance	Incorporated
Diameter (mm)	35
Length (mm)	74
Case material	Plastic
Fixing	M8 bottom screw
Termination	Push wire with 370mm leads
Temperature range ($^{\circ}$ C)	-25 +85
Dielectric	Metallized Polypropylene Film
Protected	No
Standard	EN 61048/61049

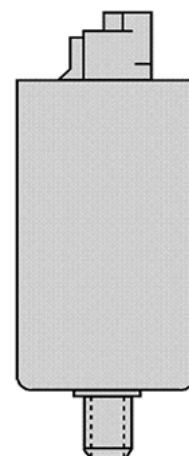

Capacitor Diagram

Revision: 10-06-2013

See page 2 for product notes



Product Code: R1008CR200P25N2

Notes:

* ENEC approved