


Description: 5 μ F 250V 300mm LEADS PLASTIC M8

Capacitor Electrical Data

Capacitance (μ F)	5
Tolerance ($\pm\%$)	10%
Voltage (V)	250
Frequency (Hz)	50/60
Discharge Resistance	Incorporated
Diameter (mm)	25
Length (mm)	56
Case material	Plastic
Fixing	M8 bottom screw
Termination	300mm leads $\hat{=}$
Temperature range ($^{\circ}$ C)	-25 +85
Dielectric	Metallized Polypropylene Film
Protected	No
Standard	EN 61048/61049

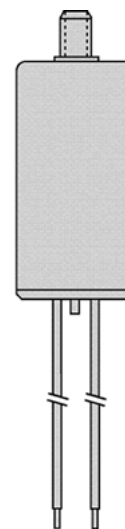

Capacitor Diagram

Revision: 10-06-2013

See page 2 for product notes

Notes:

â€ Lead temperature rating: 90Â°C

* ENEC approved