


Description: 5.5µF 250V 300mm LEADS PLASTIC M8

## Capacitor Electrical Data

|                        |                               |
|------------------------|-------------------------------|
| Capacitance (µF)       | 5.5                           |
| Tolerance (±%)         | 10%                           |
| Voltage (V)            | 250                           |
| Frequency (Hz)         | 50/60                         |
| Discharge Resistance   | Incorporated                  |
| Diameter (mm)          | 25                            |
| Length (mm)            | 56                            |
| Case material          | Plastic                       |
| Fixing                 | M8 bottom screw               |
| Termination            | 300mm leads                   |
| Temperature range (°C) | -25 +85                       |
| Dielectric             | Metallized Polypropylene Film |
| Protected              | No                            |
| Standard               | EN 61048/61049                |

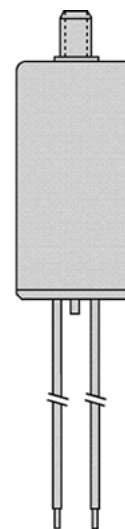

Capacitor Diagram

Revision: 10-06-2013

\*\*See page 2 for product notes\*\*

**Notes:**

â€ Lead temperature rating: 90Â°C

\* ENEC approved