
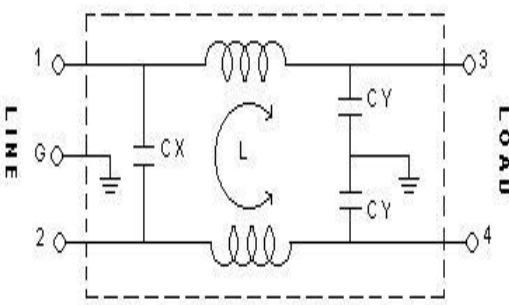


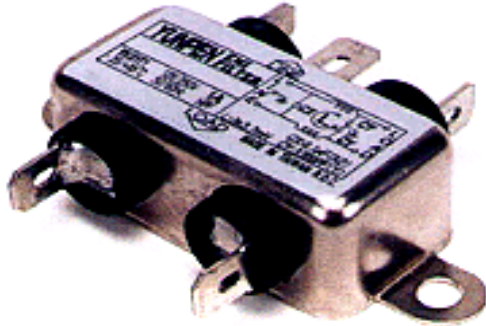

VENTURE[®]
LIGHTING

Product Specification

EMC Filter	Product Number:	EMCFLTR01
<p>Performance Data</p> <p>Rated Voltage: 250V AC Rated Current: 6A Leak Current: 0.8mA MAX Insulation Resistance: 250V, 50HZ 100M ohm MIN 250V DC Direct Current Resistance: 0.15 ohm MAX Temperature Rise: 30C MAX Operating Temperature: -25 ~ +85C Attenuation (Normal mode: 25dbMIN): 0.90 ~ 50MHZ Attenuation (Common mode: 25dbMIN): 0.60 ~ 50MHZ CX: 0.1uF CY: 3300pF*2 Inductance: 0.7mH*2</p>	<p>CIRCUIT DIAGRAM</p> 	
<p>Physical Data</p> <p>Fixing Centres (mm): 53.5 Width (mm): 48</p>		
<p>Revision: -</p>		
<p>Notes: This EMC filter can be used with our range of Ventronic VGB and VGP ballasts.</p> <p>Data is based upon tests performed by Venture Lighting in a controlled environment and is representative of relative performance at nominal power/voltage (110/240/415). Actual performance can vary depending on operating conditions. Data is subject to change without notice.</p>		
<p>Venture Lighting Europe Ltd., Trinity Court, Batchworth Island, Church Street, Rickmansworth, WD3 1RT, United Kingdom Tel: +44 (0) 845 230 2222, Fax: +44 (0) 845 230 2077, www.venturelightingeurope.com</p>		