



CONTROLS
AND ADVICE
ON REQUEST



50,000
HOURS



YEARS'
WARRANTY



NEXT DAY
DELIVERY

INDUSTRIAL SPECIALIST RANGE



VENTURE
LIGHTING



A linear highbay benefitting from **optical control** designed to **optimise light distribution** while **minimising user glare**. With a high-impact resistance construction, this product is particularly suitable for sports halls. Suspension kit is supplied as standard.

VPANEL HIGHBAY

81W VPanel, 850, 80X100Deg Beam, DALI


Order Code: VPL002-CD

Photometric Data	
Nominal Lumens	11250
Colour Rendering Index (CRI)	80-89
LPW (lm/W)	125
Beam Angle (°)	80 x 100
Light Distribution	Asymmetric
Lens / Reflector	Refractor Lens

Life Data	
Rated Life @ 25°C (Hrs)	100000
Rated Life @ Tmax (Hrs)	50000
Rated Life L70/B50 @ 25°C	100000
Rated Life L80/B50 @ Tmax (Hrs)	50000
Rated Life L80/B50 @ 25°C	80000

Electrical Data	
Power	81 - 81
Thermal Overload Protection	Yes
Overvoltage Protection	Yes
Input (W)	90
Input (V)±10%	220 - 240
Voltage Type	AC
Input Current (A)	0.43
Power Factor	0.95
No. Per C16 Breaker	3
Electrical Class	I
Type of Wiring	Ending
Wiring X-sec (mm ²)	Yes
DALI Dimming	Yes
Short Circuit Protection	Yes

Physical Data	
With Protective Cover	Yes
Ambient Rated Temperature Range (°C)	-40 - 40
Degree of Protection (IP)	IP20
Mounting Method	Pendant
Housing Colour	Grey
Housing Material	Aluminium
Reflector	None
Length (mm)	336
Width (mm)	307
Height/Depth (mm)	61
Weight (kg)	3.9
Lamp Type	LED Not Exchangeable
Reflector Material	Without Reflector
Impact Strength	IK08
Warranty (year)	5

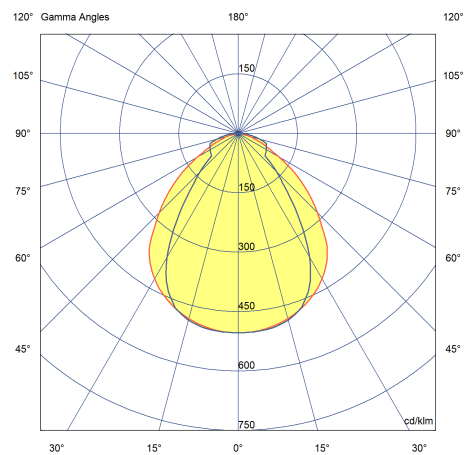

81W VPanel, 850, 80X100Deg Beam, DALI



Order Code: VPL002-CD

Accessories

ACS067 - Programming Remote for SL / SH Sensors

ACS030 - Commissioning Remote for SL / SH Sensors