

22W LED Downlight - Pro, 830, With Driver

Order Code: DWL072

Photometric Data

Colour Rendering Index (CRI)	80-89
Lumens	2640
LPW (lm/W)	120
Colour Temperature (K)	3000 - 3000
SDCM	<5
Light Distribution	Symmetric
Lens / Reflector	Diffuser lens/optic/panel

Life Data



Rated Life L70/B50 @ 25°C	50000
---------------------------	-------

Electrical Data

Input (W)	22
Input (V)±10%	220 - 240
Voltage Type	AC
Power Factor	0.9
Energy Efficiency Class (EEC)	A++, A+, A (LED)
Electrical Class	II
Type of Wiring	Ending
Wiring X-sec (mm ²)	1.0
Non-dimmable	Yes

Physical Data

Surface Protection	Powder Coating
Degree of Protection (IP)	IP40
Housing Colour	White
Housing Material	Aluminium
Reflector	None
Height/Depth (mm)	40
Diameter (mm)	225
Suitable for ceiling mounting	Yes
Suitable for built-in mounting	Yes
Cutout Height for Recess Mount (mm)	60
Cutout Diameter for Recess Mount (mm)	200
Lamp Type	LED Not Exchangeable
Surface Protection	Powder Coating
Cover Material	Opal Plastic

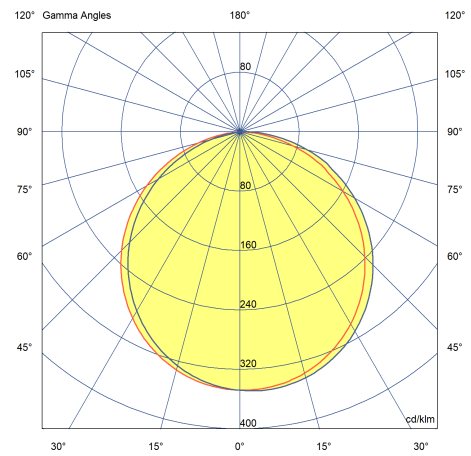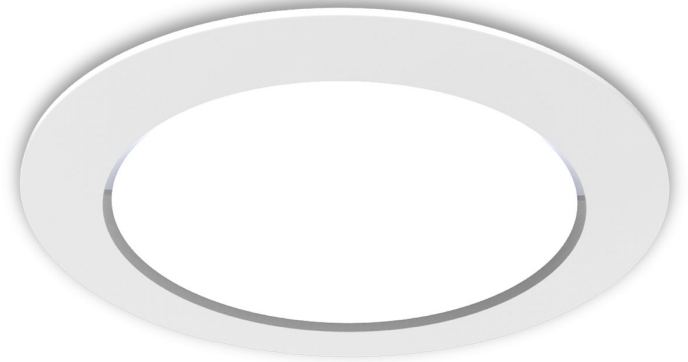

22W LED Downlight - Pro, 830, With Driver



Order Code: DWL072

Environmental Data

Ambient Rated Temperature Range (°C)	-10 to 35
--------------------------------------	-----------

Accessories

EMG013 - Emergency Downlight

EMG018 - Remote Emergency Pack