



1-10V
DIMMABLE

CONTROLS
AND ADVICE
ON REQUEST

100,000
HOURS
(AT 25°C)

50,000
HOURS
(AT 65°C)

5
YEARS'
WARRANTY
(AT 65°C)

10
YEARS'
WARRANTY
(AT 40°C)

NEXT DAY
DELIVERY

INDUSTRIAL RANGE



VENTURE
LIGHTING



A premium high efficiency,
low maintenance LED luminaire
designed using the best components.
Achieves 140 Lumens per Watt even at
raised temperature levels of 65°C in the most
demanding industrial applications with its
high-pressure diecast aluminium housing.

HYSKEIR
ELITE HIGHBAY

90W Hyskeir Highbay ELITE , 850, 1-10V


Order Code: IND174-C10

Photometric Data	
Lumens	14000
Colour Rendering Index (CRI)	80-89
LPW (lm/W)	140
Colour Temperature (K)	5000 - 5000
SDCM	3
Beam Angle (°)	120
Light Distribution	Symmetric
Lens / Reflector	None

Life Data	
Rated Life @ 25°C (Hrs)	100000
Rated Life @ Tmax (Hrs)	50000
Rated Life L80/B50 @ Tmax (Hrs)	50000
Rated Life L80/B50 @ 25°C	100000

Electrical Data	
LED Power	90 - 90
Thermal Overload Protection	Yes
Overvoltage Protection	Yes
Input (W)	100
Input (V)±10%	120 - 277
Voltage Type	AC
Input Current (A)	0.48
Power Factor	0.95
No. Per C16 Breaker	8
Electrical Class	I
Type of Wiring	Ending
Wiring X-sec (mm ²)	1.0
1-10V Dimming	Yes
LED Nominal Current (mA)	1900 - 1900
Short Circuit Protection	Yes

Physical Data	
With Protective Cover	Yes
Degree of Protection (IP)	IP66
Mounting Method	Pendant
Housing Colour	Black
Housing Material	Aluminium
Reflector	None
Height/Depth (mm)	220
Diameter (mm)	320
Weight (kg)	6.3
Lamp Type	LED Not Exchangeable
Reflector Material	Without Reflector
Impact Strength	IK10
Warranty (year)	10

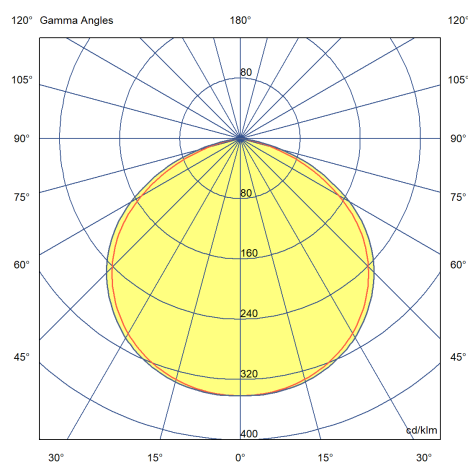

Order Code: IND174-C10

Environmental Data

Ambient Rated Temperature Range (°C)	-40 to 65
--------------------------------------	-----------

Accessories

ACS137 - 60° Aluminium Reflector

ACS138 - 90° Aluminium Reflector

ACS141 - Rotatable Mounting Bracket

ACS142 - 90° Polycarbonate Refractor

EMG024 - High Output Emergency Pod

Logistical Data

Item Gross Weight (kg)	7.2
------------------------	-----

Packaging Length (cm)	39
-----------------------	----

Packaging Width (cm)	39
----------------------	----

Packaging Height (cm)	21
-----------------------	----