



1-10V
DIMMABLE

CONTROLS
AND ADVICE
ON REQUEST

100,000
HOURS
(AT 25°C)

50,000
HOURS
(AT 65°C)

5
YEARS'
WARRANTY
(AT 65°C)

10
YEARS'
WARRANTY
(AT 40°C)

NEXT DAY
DELIVERY

INDUSTRIAL RANGE



VENTURE
LIGHTING



A premium high efficiency,
low maintenance LED luminaire
designed using the best components.
Achieves 140 Lumens per Watt even at
raised temperature levels of **65°C** in the most
demanding industrial applications with its
high-pressure diecast aluminium housing.

HYSKEIR
ELITE HIGHBAY

240W Hyskeir Highbay ELITE , 840, 1-10V

Order Code: IND177-C10

Photometric Data

Lumens	35200
Colour Rendering Index (CRI)	80-89
LPW (lm/W)	140
Colour Temperature (K)	4000 - 4000
SDCM	3
Beam Angle (°)	120
Light Distribution	Symmetric
Lens / Reflector	None

Life Data


Rated Life @ 25°C (Hrs)	100000
Rated Life @ Tmax (Hrs)	50000
Rated Life L80/B50 @ Tmax (Hrs)	50000
Rated Life L80/B50 @ 25°C	100000

Electrical Data

LED Power	240 - 240
Thermal Overload Protection	Yes
Overvoltage Protection	Yes
Input (W)	260
Input (V)±10%	120 - 277
Voltage Type	AC
Input Current (A)	1.24
Power Factor	0.95
No. Per C16 Breaker	3
Electrical Class	I
Type of Wiring	Ending
Wiring X-sec (mm ²)	1.0
1-10V Dimming	Yes
LED Nominal Current (mA)	5600 - 5600
Short Circuit Protection	Yes

Physical Data

With Protective Cover	Yes
Degree of Protection (IP)	IP66
Mounting Method	Pendant
Housing Colour	Black
Housing Material	Aluminium
Reflector	None
Height/Depth (mm)	220
Diameter (mm)	320
Weight (kg)	6.3
Lamp Type	LED Not Exchangeable
Reflector Material	Without Reflector
Impact Strength	IK10
Warranty (year)	10

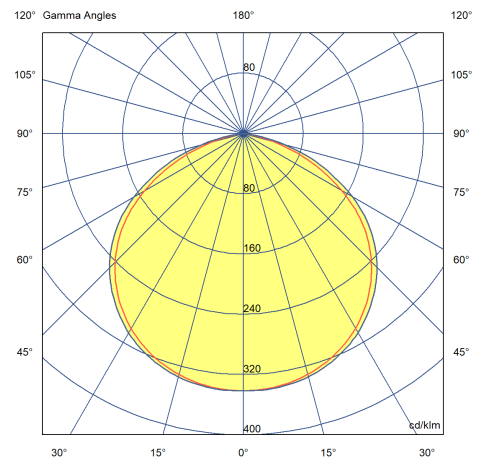

Order Code: IND177-C10

Environmental Data

Ambient Rated Temperature Range (°C)	-40 to 50
--------------------------------------	-----------

Accessories

ACS137 - 60° Aluminium Reflector

ACS138 - 90° Aluminium Reflector

ACS141 - Rotatable Mounting Bracket

ACS142 - 90° Polycarbonate Refractor

EMG024 - High Output Emergency Pod

Logistical Data

Item Gross Weight (kg)	7.2
------------------------	-----

Packaging Length (cm)	39
-----------------------	----

Packaging Width (cm)	39
----------------------	----

Packaging Height (cm)	21
-----------------------	----