



50,000 HOURS



YEARS' WARRANTY




NEXT DAY DELIVERY

COMMERCIAL RANGE



VENTURE LIGHTING

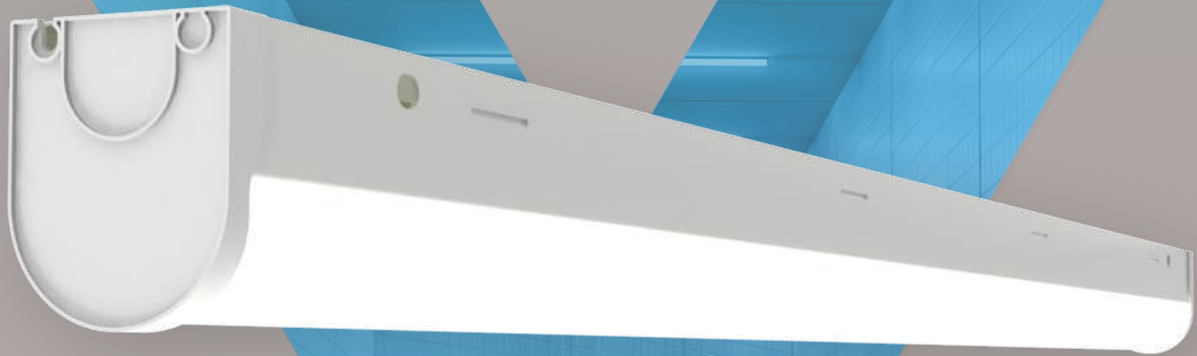

The new Baily batten is designed with the installer in mind. With BESA fixing points and a quick install gear tray, installation time can be greatly reduced. Available with a range of energy saving sensors, emergency and DALI options the Baily Batten adapts to your needs.

BAILY BATTEN

32W Baily Batten, 4ft, 840


Order Code: BTN041

Photometric Data	
Colour Rendering Index (CRI)	80-89
Lumens	4250
LPW (lm/W)	118
Colour Temperature (K)	4000 - 4000
Lens / Reflector	Diffuser lens/optic/panel
SDCM	

Life Data		
Rated Life (Hrs)	Ta = 25C	
	50000	
Lumen Maintenance (Hrs)	Ta = 25C	
	B50	B10
	L70	50000
	L80	-
L90	-	-

Electrical Data	
Input (W)	36
Input (V)±10%	220 - 240
Voltage Type	AC
Power Factor	0.95
Energy Efficiency Class (EEC)	A++, A+, A (LED)
Electrical Class	I
Type of Wiring	Ending
Wiring X-sec (mm ²)	1.5
Non-dimmable	Yes
LED Nominal Current	1000 - 1000
Input Current (A)	0.16

Physical Data	
Degree of Protection (IP)	IP20
Housing Colour	White
Length (mm)	1165
Width (mm)	62
Height/Depth (mm)	78
Lamp Type	LED Not Exchangeable

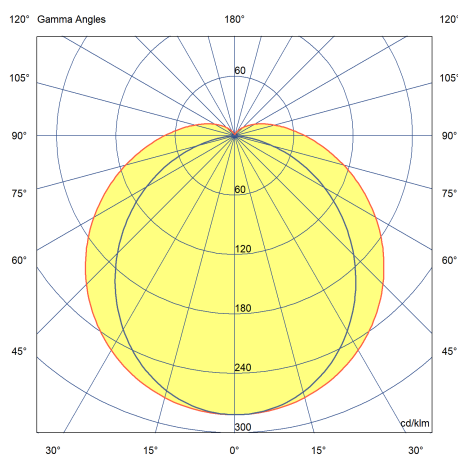

32W Baily Batten, 4ft, 840



Order Code: BTN041

Environmental Data

Min. Ambient Temperature (°C)	-20
Max. Ambient Temperature (°C)	40

Accessories

ACS030 - Commissioning Remote for SL Sensors

ACS067 - Programming Remote for SL Sensors

ACS153 - Remote for SB Sensors

Logistical Data

Item Gross Weight (kg)	2.1
Packaging Length (cm)	116.5
Packaging Width (cm)	6.5
Packaging Height (cm)	8.5
Carton Quantity	6
Carton Length (cm)	118
Carton Width (cm)	18
Carton Height (cm)	21
Carton Gross Weight (kg)	13.2