TP(a) IP44 L80 50,000 HOURS 5 YEARS' WARRANTY NEXT DAY DELIVERY UGR UGR19 SMALL ROOMS UGR22 ALL ROOMS

COMMERCIAL RANGE

VENTURE LIGHTING

BACKLIT
Technology

DUAL OPTIC
System

TEXTURED
Diffuser

The new **Backlit Panel Pro** brings **product design and reliability** to the forefront. **Offering an impressive 110lm/W**, multiple lumen outputs and huge cost savings against traditional lighting as well as old LED designs. **Easy installation with plug and play connectors and flicker-free, loop in loop out drivers.**

The Backlit Panel Pro has also undergone testing at the **LIA** and is **TP(a) certified.**

BACKLIT PANEL PRO

25W Backlit Panel Pro, 600x600mm, 860, Driver

Order Code: PNL078-KIT01

Photometric Data	
Nominal Lumens	3130
LPW (lm/W)	112
Light Distribution	Symmetric
Lens / Reflector	Diffuser lens/optic/panel

Life Data	
Rated Life L80/B50 @ 25°C	50000

Electrical Data	
Input (W)	28
Input (V)±10%	220 - 240
Voltage Type	AC
Power Factor	0.95
Type of Wiring	Suitable for Through Wiring
Non-dimmable	Yes
LED Nominal Current (mA)	750 - 750

Physical Data	
Ambient Rated Temperature Range (°C)	-20 - 40
Degree of Protection (IP)	IP54
Housing Colour	White
Housing Material	Steel
Length (mm)	595
Width (mm)	595
Height/Depth (mm)	35
Suitable for ceiling mounting	Yes
Suitable for recessed mounting	Yes
Cutout Height for Recess Mount (mm)	75
Lamp Type	LED Not Exchangeable
Cover Material	Opal Plastic
Impact Strength	IK03

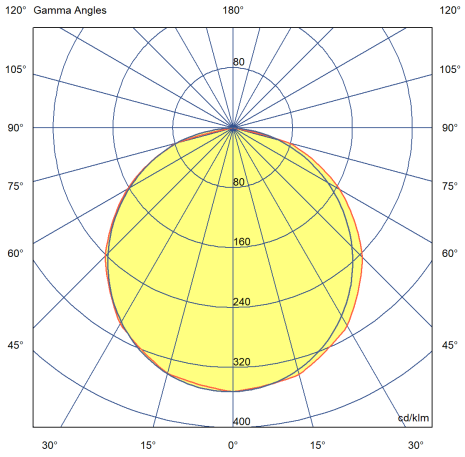

25W Backlit Panel Pro, 600x600mm, 860, Driver

Order Code: PNL078-KIT01

Accessories
EMG013 - 3W LED Emergency Downlight
EMG018v2 - 3W Remote Emergency Pack
ACS198 - Suspension Mount kit for Backlit Panels
ACS199 - Recess Mount Kit for Backlit Panels
ACS057 - Surface Mount Box for 600 x 600mm Panel

Logistical Data	
Item Gross Weight (kg)	2.1
Packaging Length (cm)	65.5
Packaging Width (cm)	64.5
Packaging Height (cm)	5.5
Carton Quantity	5
Carton Length (cm)	68
Carton Width (cm)	66
Carton Height (cm)	29
Carton Gross Weight (kg)	11