

# 22W LED Downlight - Pro, 830, With Driver

Order Code: DWL072

## Photometric Data

Nominal Lumens	2640
LPW (lm/W)	120
SDCM	<5
Light Distribution	Symmetric
Lens / Reflector	Diffuser lens/optic/panel

## Life Data



Rated Life L70/B50 @ 25°C	50000
---------------------------	-------

## Electrical Data

Input (W)	22
Input (V)±10%	220 - 240
Voltage Type	AC
Power Factor	0.9
Type of Wiring	Ending
Wiring X-sec (mm <sup>2</sup> )	1.0
Non-dimmable	Yes

## Physical Data

Ambient Rated Temperature Range (°C)	-10 - 35
Degree of Protection (IP)	IP40
Housing Colour	White
Housing Material	Aluminium
Reflector	None
Height/Depth (mm)	40
Diameter (mm)	225
Suitable for ceiling mounting	Yes
Suitable for recessed mounting	Yes
Cutout Height for Recess Mount (mm)	60
Lamp Type	LED Not Exchangeable
Surface Protection	Powder Coating
Cover Material	Opal Plastic

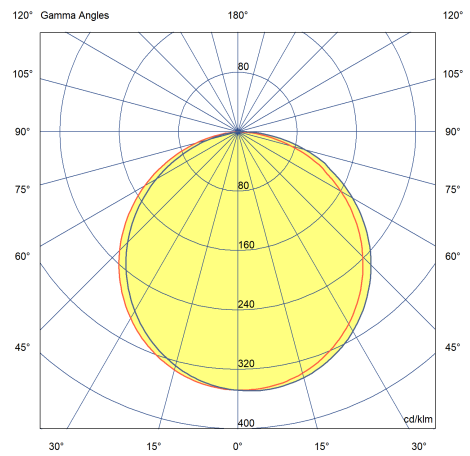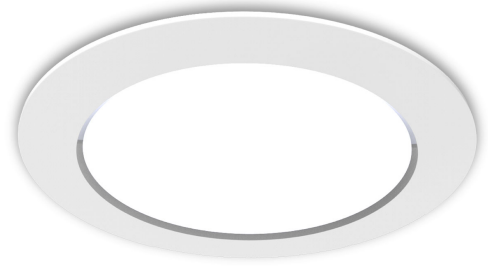

# 22W LED Downlight - Pro, 830, With Driver

---

Order Code: DWL072

## Accessories

---

EMG037 - Emergency Downlight

---

EMG018v2 - Remote Emergency Pack

---