



IK08

IP65

ECA

1-10V
DIMMABLE

CONTROLS
AND ADVICE
ON REQUEST

L80

85,000
HOURS

5
YEARS'
WARRANTY

NEXT DAY
DELIVERY

INDUSTRIAL RANGE



VENTURE
LIGHTING



The improved Hyskeir Pro 2 Highbay featuring our **new green design** delivers the same lumen package with a **20% smaller heatsink profile**. Packaging volume has been reduced by 35-45% using **fully recyclable cardboard**. An all in one solution for your highbay requirements.

HYSKEIR

PRO 2 HIGHBAY

140W Hyskeir Pro 2 Highbay, 850, 1-10V

Order Code: IND169v2-C10

Photometric Data

Nominal Lumens	19800
Light Distribution	Symmetric
Lens / Reflector	None

Life Data




Rated Life L70/B10 @ 25°C	85000
Rated Life L80/B10 @ 25°C	55000
Rated Life L90/B10 @ 25°C	25000

Electrical Data

Input (W)	150
Input (V)±10%	220 - 240
Voltage Type	AC
Power Factor	0.95
Type of Wiring	Ending
Wiring X-sec (mm ²)	Yes
1-10V Dimming	Yes
LED Nominal Current (mA)	1130 - 1130

Physical Data

With Protective Cover	Yes
Ambient Rated Temperature Range (°C)	-30 - 40
Degree of Protection (IP)	IP65
Housing Colour	Black
Housing Material	Aluminium
Reflector	None
Height/Depth (mm)	185
Diameter (mm)	260
Lamp Type	LED Not Exchangeable
Reflector Material	Without Reflector
Ball Proof	Yes
Impact Strength	IK08

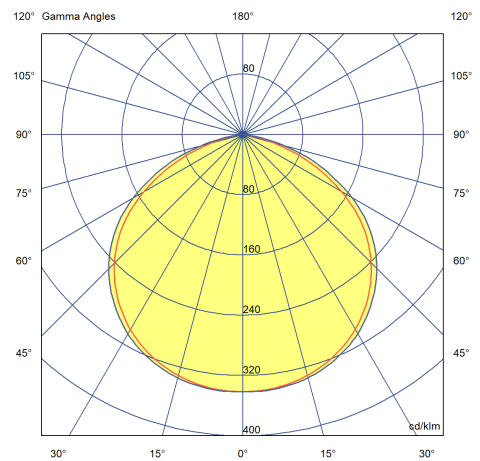

140W Hyskeir Pro 2 Highbay, 850, 1-10V

Order Code: IND169v2-C10

Accessories

ACS137 - 60° Aluminium Reflector

ACS142 - 90° Polycarbonate Reflector

ACS138 - 90° Aluminium Reflector

ACS141 - Surface Mounting Bracket

ACS140 - Programming Remote for Microwave Sensors

ACS140v2 - V2 Programming Remote for Microwave Sensors

Logistical Data

Item Gross Weight (kg) 4.5

Packaging Length (cm) 32

Packaging Width (cm) 32

Packaging Height (cm) 21