15W LED Downlight - Pro, 830, With Driver

Order Code: DWL070

Photometric Data	
Nominal Lumens	1800
LPW (lm/W)	120
SDCM	<5
Light Distribution	Symmetric
Lens / Reflector	Diffuser lens/optic/panel

Life Data	
Rated Life L70/B50 @ 25°C	50000

Electrical Data	
Input (W)	15
Input (V)±10%	220 - 240
Voltage Type	AC
Power Factor	0.9
Type of Wiring	Ending
Wiring X-sec (mm^2)	1.0
Non-dimmable	Yes

Physical Data	
Ambient Rated Temperature Range (°C)	-10 - 35
Degree of Protection (IP)	IP40
Housing Colour	White
Housing Material	Aluminium
Reflector	None
Height/Depth (mm)	40
Diameter (mm)	225
Suitable for ceiling mounting	Yes
Suitable for recessed mounting	Yes
Cutout Height for Recess Mount (mm)	60
Lamp Type	LED Not Exchangeable
Surface Protection	Powder Coating
Cover Material	Opal Plastic

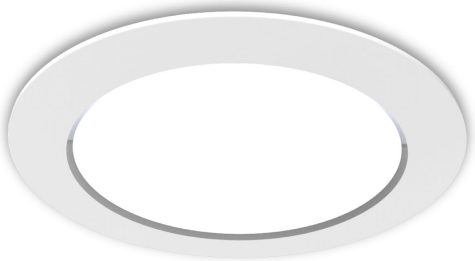

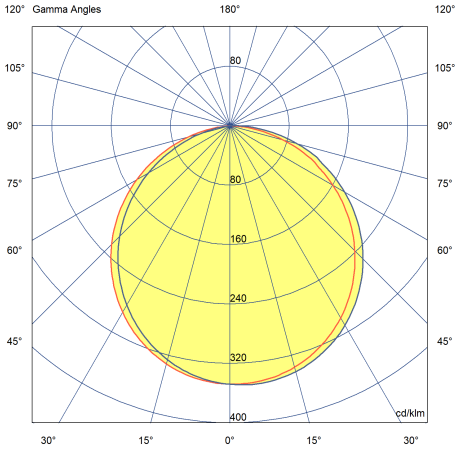

15W LED Downlight - Pro, 830, With Driver

Order Code: DWL070

Accessories
EMG037 - Emergency Downlight
EMG018v2 - Remote Emergency Pack