

36W LED Panel - Lite, 600x600mm, 860 with Driver

Order Code: PNL048-KIT01

Photometric Data

Lumens	3500
LPW (lm/W)	87
Colour Temperature (K)	5900 - 6100
Light Distribution	Symmetric
Lens / Reflector	Diffuser lens/optic/panel

Life Data



Rated Life L80/B50 @ 25°C	30000
---------------------------	-------

Electrical Data

Input (W)	40
Input (V)±10%	220 - 240
Voltage Type	AC
Power Factor	0.9
Type of Wiring	Ending
Wiring X-sec (mm ²)	1.5
Non-dimmable	Yes
LED Nominal Current (mA)	1000 - 1000

Physical Data

Degree of Protection (IP)	IP40
Housing Colour	White
Housing Material	Aluminium
Length (mm)	595
Width (mm)	595
Height/Depth (mm)	10
Suitable for ceiling mounting	Yes
Suitable for recessed mounting	Yes
Cutout Height for Recess Mount (mm)	50
Cutout Width for Recess Mount (mm)	600
Cut Out Length for Recess Mount (mm)	600
Lamp Type	LED Not Exchangeable
Cover Material	Opal Plastic

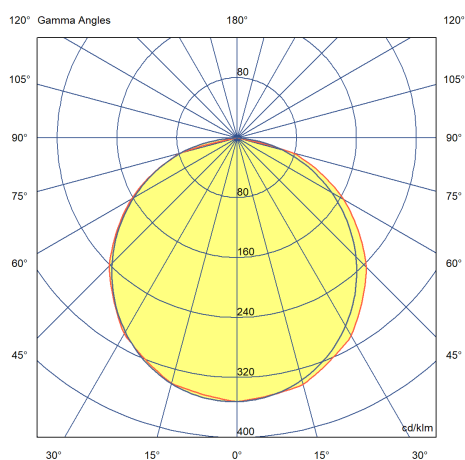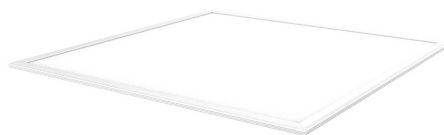

36W LED Panel - Lite, 600x600mm, 860 with Driver

Order Code: PNL048-KIT01

Environmental Data

Ambient Rated Temperature Range (°C)	-10 to 40
--------------------------------------	-----------

Accessories

EMG013 - 3W LED Emergency Downlight

EMG018 - Emergency Remote Pack

ACS057 - Surface Mount Box for 600 x 600mm Panel
--
