

27W LED Panel - Pro, 600 x 600mm, 840, Driver

Order Code: PNL036-KIT01

Photometric Data

Lumens	3150
LPW (lm/W)	105
Colour Temperature (K)	4000 - 4000
Light Distribution	Symmetric
Lens / Reflector	Diffuser lens/optic/panel

Life Data


Rated Life L80/B50 @ 25°C	50000
---------------------------	-------

Electrical Data

Input (W)	30
Input (V)±10%	220 - 240
Voltage Type	AC
Power Factor	0.95
Type of Wiring	Ending
Wiring X-sec (mm ²)	1.5
Non-dimmable	Yes
LED Nominal Current (mA)	750 - 750

Physical Data

Degree of Protection (IP)	IP40
Housing Colour	White
Housing Material	Steel
Length (mm)	595
Width (mm)	595
Height/Depth (mm)	10
Suitable for ceiling mounting	Yes
Suitable for recessed mounting	Yes
Cutout Height for Recess Mount (mm)	50
Cutout Width for Recess Mount (mm)	600
Cut Out Length for Recess Mount (mm)	600
Lamp Type	LED Not Exchangeable
Cover Material	Opal Plastic

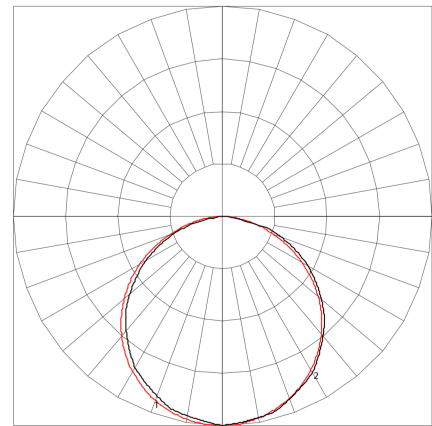

1 - Vertical Plane Through Horizontal Angles (180 - 0) (Through Max. Cd.)
2 - Vertical Plane Through Horizontal Angles (90 - 270)

27W LED Panel - Pro, 600 x 600mm, 840, Driver

Order Code: PNL036-KIT01

Environmental Data

Ambient Rated Temperature Range (°C)	-20 to 45
--------------------------------------	-----------

Accessories

EMG013 - 3W LED Emergency Downlight

EMG018 - 3W Remote Emergency Pack

ACS015 - Suspension Mount Kit

ACS016 - Recess Mount Kit for EdgeLit Panels

ACS057 - Surface Mount Box for 600 x 600mm Panel

Logistical Data

Item Gross Weight (kg)	2.27
------------------------	------

Packaging Length (cm)	63
-----------------------	----

Packaging Width (cm)	63
----------------------	----

Packaging Height (cm)	3
-----------------------	---

Carton Quantity	6
-----------------	---

Carton Length (cm)	64
--------------------	----

Carton Width (cm)	64
-------------------	----

Carton Height (cm)	22
--------------------	----

Carton Gross Weight (kg)	14.5
--------------------------	------