

27W LED Panel - Pro, 600x600mm, TP(a), 840 with Driver

Order Code: PNL052-KIT01

Photometric Data

Nominal Lumens	3150
LPW (lm/W)	105
Light Distribution	Symmetric
Lens / Reflector	Diffuser lens/optic/panel

Life Data


Rated Life L70/B50 @ 25°C	50000
---------------------------	-------

Electrical Data

Input (W)	30
Input (V)±10%	220 - 240
Voltage Type	AC
Power Factor	0.9
Type of Wiring	Ending
Wiring X-sec (mm ²)	1.5
Non-dimmable	Yes
LED Nominal Current (mA)	750 - 750

Physical Data

Ambient Rated Temperature Range (°C)	-10 - 40
Degree of Protection (IP)	IP40
Housing Colour	White
Housing Material	Aluminium
Length (mm)	595
Width (mm)	595
Height/Depth (mm)	10
Suitable for ceiling mounting	Yes
Suitable for recessed mounting	Yes
Cutout Height for Recess Mount (mm)	50
Cutout Width for Recess Mount (mm)	600
Cut Out Length for Recess Mount (mm)	600
Lamp Type	LED Not Exchangeable
Cover Material	Opal Plastic

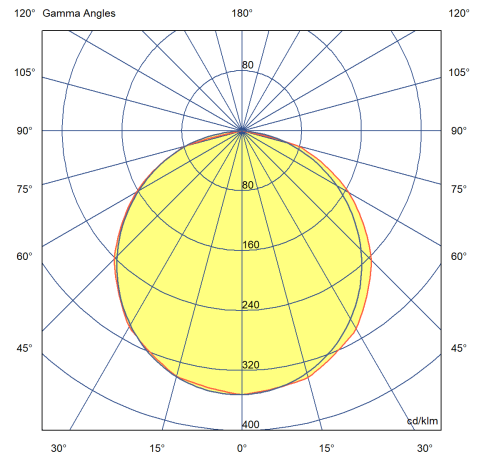

27W LED Panel - Pro, 600x600mm, TP(a), 840 with Driver

Order Code: PNL052-KIT01

Accessories

ACS015 - Suspension Mounting Kit

ACS016 - Recess Mounting Kit

ACS057 - Surface Mounting Box

EMG013 - Emergency Downlight

EMG018 - Emergency Remote Pack