

IK07

IP66

ECA

L70



110,000
HOURS

L80

85,000
HOURS



5
YEARS'
WARRANTY



NEXT DAY
DELIVERY

EXTERIOR RANGE



VENTURE
LIGHTING



PORTLAND FLOODLIGHT

Our **new** floodlight features an impressive 125 lumens per Watt in a **compact** and **thermally efficient** housing. **Versatile mounting options** make the Portland at home in any application and **precise asymmetric light distribution** ensures every lumen is placed exactly where you need it. The ideal solution for professional lighting designs.

95W Portland Floodlight, 840, D1




Order Code: FLD151-D1

Photometric Data	
Lumens	12500
LPW (lm/W)	125
Colour Temperature (K)	4000 - 4000
SDCM	<6
Light Distribution	Asymmetric
Lens / Reflector	Refractor Lens

Life Data	
Rated Life L70/B10 @ 25°C	110000
Rated Life L70/B50 @ 25°C	110000
Rated Life L80/B10 @ 25°C	77000
Rated Life L90/B50 @ 25°C	42000
Rated Life L90/B10 @ 25°C	36000
Rated Life L80/B50 @ 25°C	89000

Electrical Data	
Input (W)	100
Input (V)±10%	220 - 240
Voltage Type	AC
Power Factor	0.93
THD (%)	5
Type of Wiring	Ending
Wiring X-sec (mm ²)	1.5
Non-dimmable	Yes

Physical Data	
Degree of Protection (IP)	IP66
Housing Colour	Black
Housing Material	Aluminium
Reflector	None
Length (mm)	335
Width (mm)	296
Height/Depth (mm)	71
Suitable for ceiling mounting	Yes
Suitable for wall mounting	Yes
Suitable for surface mounting	Yes
Lamp Type	LED Not Exchangeable
Surface Protection	Powder Coating
Cover Material	Transparent Glass
Impact Strength	IK07

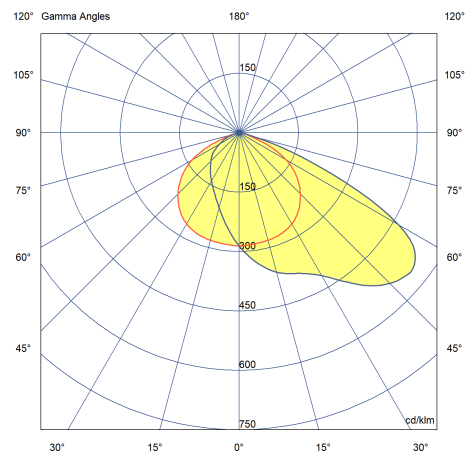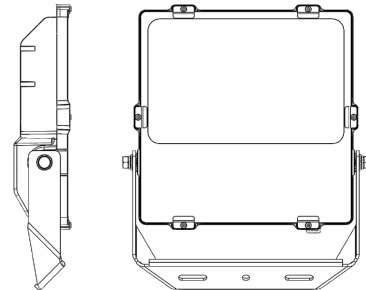

95W Portland Floodlight, 840, D1

Order Code: FLD151-D1

Environmental Data

Ambient Rated Temperature Range (°C)	-30 to 40
--------------------------------------	-----------

Accessories

ACS187 - 42mm Pole Mount Bracket

ACS188 - 60mm Pole Mount Bracket

ACS189 - 76mm Pole Mount Bracket

Logistical Data

Item Gross Weight (kg)	4.5
------------------------	-----

Packaging Length (cm)	40
-----------------------	----

Packaging Width (cm)	33.5
----------------------	------

Packaging Height (cm)	12.5
-----------------------	------