15W Exterior Bulkhead, Black, IP66, 840

Order Code: EXT008

Photometric Data	
Lumens	1,200
LPW	80
Rated Life (Hrs)	50,000
L80 B50 @ 25C (Hrs)	>36,000
L80 B50 @ Ta Max (Hrs)	>36,000
CCT (K)	4000
CRI (Ra)	>80

Electrical Data	
Input (V) ±10%	220-240
Input (W)	15
LED (W)	15
Input (A)	0.13
Electrical Class	2
Inrush (A) (Ipeak)	40
Inrush (µs) (Ipeak/2)	50
No. per C16	60
Forward (mA)	750
Forward (V)	36
Power Factor	>0.9
THD (%)	<20

Physical Data	
Lens Type	Polycarbonate
Case Material	Polycarbonate
Dimensions (mm)	Dia 300 x 100
Weight (kg)	3.06
Connector Type Input	Flying Lead

15W Exterior Bulkhead, Black, IP66, 840

Order Code: EXT008

Environmental Data	
Max. Ambient (°C)	40
Min. Ambient (°C)	-25
IP Rating	IP66
IK Rating	IK10

General Data	
Energy Rating	A

Product Builder	
-SM	Integral Microwave Sensor
-EM	Integral Emergency (EXT007 & 008 only)

50,000 Hours

5 Years Warranty

CE

IP66

15W Exterior Bulkhead, Black, IP66, 840

Order Code: EXT008

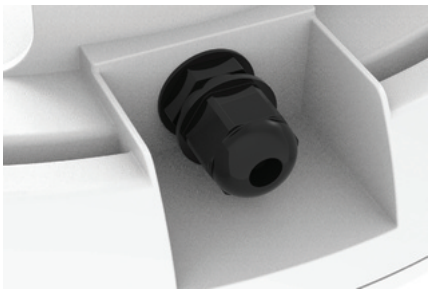

Cable Entry Gland (15W Pictured)

Order Code: EXT008

NOTES:

For the Panel Kit add "Kit Code" after Panel number (PNL013 - KIT01).

The LED panels featured above are all supplied WITHOUT drivers. Simply refer to our range of Panel Kits listed above to select the panel with the right driver to suit your application. Whatever your LED panel lighting application, our range of Panel Kits will provide the right type of driver specification to meet your requirements.