LED EMERGENCY PACK

Item Code: EMG018

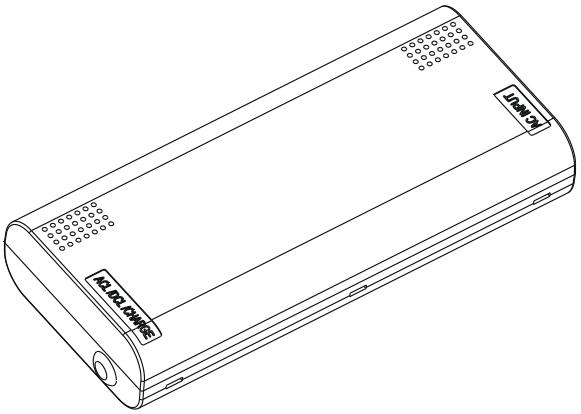

Technical parameters:

1.Operating environmental temperature:0℃~50℃
2.Rated input voltage:220~240V 50/60Hz
3.Battery standard:3.6V 4.5Ah Ni-Cd battery
4.LED light installed or replaced:10V-60V LED LIGHT
5.Emergency duration:3 hours

Note:

1.Please read installation instructions before connecting to mains supply and ensure that no polarities are reversed.

2.Switch off mains supply before replacing the LED light or battery.

3.Unit is supplied with battery disconnected please open cover and connect battery before first use.

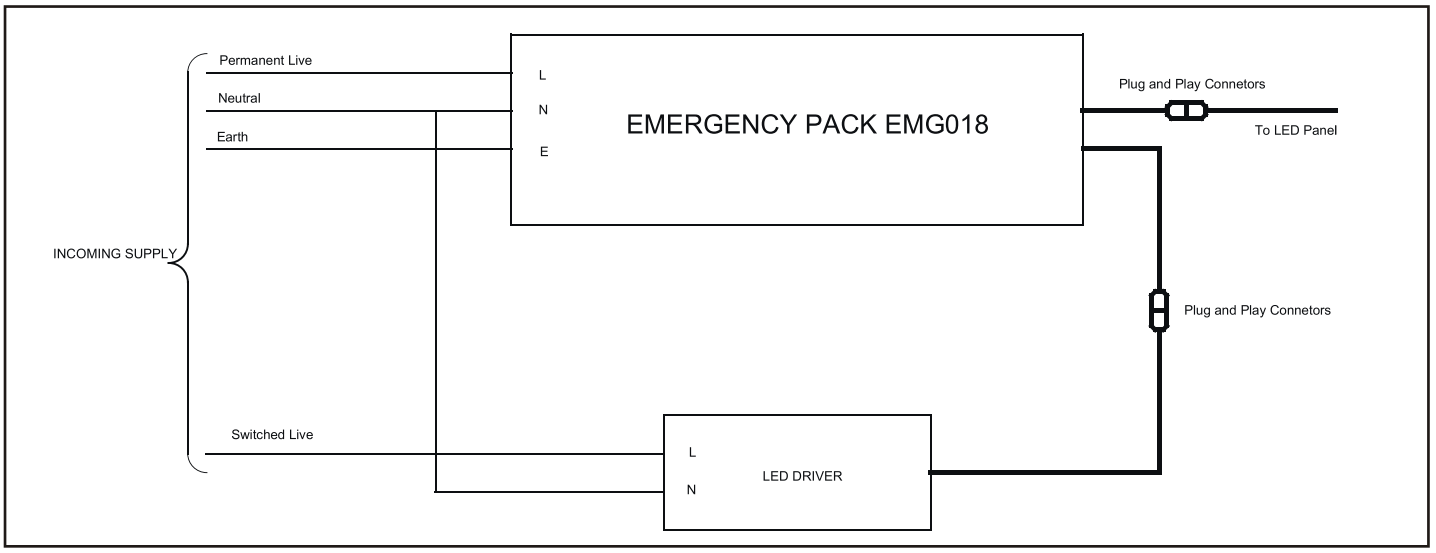

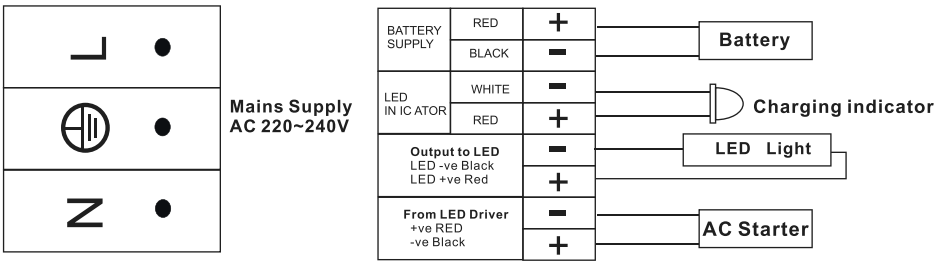

CE IP20 RoHS

Version 2: 27/06/18

Email: sales@venturelighting.co.uk Phone: +44 (0) 1923 692600 Web: www.venturelightingeurope.com

VENTURE®
LIGHTING

AUTO-TEST INSTRUCTION

Self-test:(In AC220-240V supply)
After the light is installed, whilst it connects to the AC supply, the emergency light start the timing of monthly test, which is 30 days for a cycle. When it starts the monthly test, the load LED will be on for 10 minutes. At this month, it checks if the light works properly.

When the timing reaches the 360th day, it will start the yearly test, which the load LED will be on for 3 hours. At this moment, it checks if the light works properly and has the sufficient discharge time. When the monthly and yearly tests are completed, whilst concludes the light works normally. The light will automatically return to normal working status.

INDICATOR WORKING PERFORMANCE:

Normal Working: Green LED indicator is on;
Battery Failure: Red LED indicator flashes once a second;
Insufficient Rated Duration Time: Red LED indicator flashes three times a second.

ROUTINE TEST RECORD

MONTH	TEST	First Year		Second Year		Third Year		Fourth Year		Fifth Year	
		Signed	Date	Signed	Date	Signed	Date	Signed	Date	Signed	Date
1	Function										
2	Function										
3	Function										
4	Function										
5	Function										
6	Function										
7	Function										
8	Function										
9	Function										
10	Function										
11	Function										
12	Function										

Email: sales@venturelighting.co.uk Phone: +44 (0) 1923 692600 Web: www.venturelightingeurope.com