

Ventronic




Ballast Code	Type	Lamp Types
V150SSB255-WiMAC	Dimming	150W (Quartz, Ceramic, HPS)

Electrical Data

Actual Lamp Power (W)	148	Power Factor	>0.95
Circuit Watts (W)	161	Lamp Waveform	Square Wave
		Ignition Voltage (kV)	2.5
Input Voltage (V)	220 - 240 ± 10%	Short Circuit Protection	Yes
Frequency	50 / 60Hz	Continuous Open Circuit	Yes
Max Ballasts per Circuit	19	Maximum Cable Capacitance (pf)	2500
Dimming Power Level	Adjustable	Lamp Operating Frequency (Hz)	160

Physical Data / Requirements

Termination	Type	Grip Wire
	Size (mm ²)	2.5
	Length (mm)	
Case Type		Aluminium Covered
Weight (g)		425
Length (mm)		144
Width (mm)		91
Height (mm)		37
Fixings (mm)		130 - 135 x 73 - 78
Thermal Protection		Yes
End of Lamp Protection		Yes
Maximum Case Temperature (°C)		80
Thermal Protection Auto Reset		Yes
Maximum Ambient Temperature (°C)		50
Minimum Ambient Temperature (°C)		-40

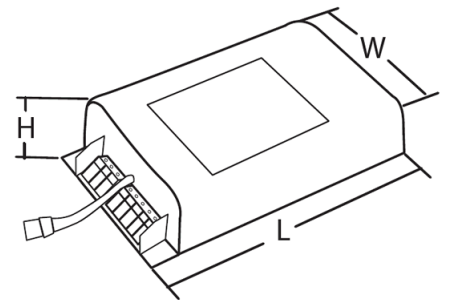

Additional Information