

27W Edgelit LED Panel, 1200x300mm, 840, Smooth with Driver

Order Code: PNL021-KIT01

Photometric Data

Lumens	3030
LPW (lm/W)	101
Colour Temperature (K)	4000 - 4000
Light Distribution	Symmetric
Lens / Reflector	Diffuser lens/optic/panel

Life Data


Rated Life L80/B50 @ 25°C	50000
---------------------------	-------

Electrical Data

Input (W)	30
Input (V)±10%	220 - 240
Voltage Type	AC
Power Factor	0.9
Type of Wiring	Ending
Wiring X-sec (mm ²)	1.5
Non-dimmable	Yes
LED Nominal Current (mA)	750 - 750

Physical Data

Degree of Protection (IP)	IP40
Housing Colour	White
Housing Material	Aluminium
Length (mm)	1195
Width (mm)	295
Height/Depth (mm)	10
Suitable for ceiling mounting	Yes
Suitable for recessed mounting	Yes
Cutout Height for Recess Mount (mm)	50
Cutout Width for Recess Mount (mm)	300
Cut Out Length for Recess Mount (mm)	1200
Lamp Type	LED Not Exchangeable
Cover Material	Opal Plastic

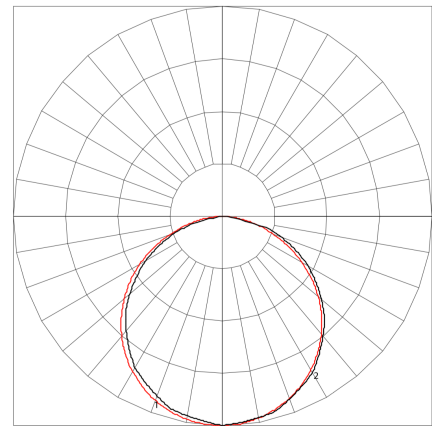

1 - Vertical Plane Through Horizontal Angles (180 - 0) (Through Max. Cd.)
2 - Vertical Plane Through Horizontal Angles (90 - 270)

27W Edgelit LED Panel, 1200x300mm, 840, Smooth with Driver

Order Code: PNL021-KIT01

Environmental Data

Ambient Rated Temperature Range (°C)	-20 to 45
--------------------------------------	-----------

Accessories

EMG013 - Emergency Downlight

EMG018 - Emergency Remote Pack

ACS016 - Recess Mounting Kit

ACS043 - Suspension Mounting Kit

ACS059 - Surface Mounting Box

Logistical Data

Item Gross Weight (kg)	3.42
------------------------	------

Packaging Length (cm)	129
-----------------------	-----

Packaging Width (cm)	35
----------------------	----

Packaging Height (cm)	5
-----------------------	---

Carton Quantity	5
-----------------	---

Carton Length (cm)	131
--------------------	-----

Carton Width (cm)	270
-------------------	-----

Carton Height (cm)	380
--------------------	-----

Carton Gross Weight (kg)	18.3
--------------------------	------